

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
5 August 2004 (05.08.2004)


PCT

(10) International Publication Number
WO 2004/065175 A1

- (51) International Patent Classification⁷: **B60R 11/02, H04M 1/04**
- (21) International Application Number: **PCT/EP2003/014680**
- (22) International Filing Date: **27 November 2003 (27.11.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **03001560.6 23 January 2003 (23.01.2003) EP**
- (71) Applicant (for all designated States except US): **SONY ERICSSON MOBILE COMMUNICATIONS AB [SE/SE]; Nya Vattentornet, S-221 88 Lund (SE).**
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **MOLLINARI, Maurizio [IT/IT]; Viale Pasteur, 5, I-00144 Roma (IT).**
- (74) Agent: **KÖRBER, Martin; Mitscherlich & Partner, Sonnenstrasse 33, 80331 München (DE).**
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**
- (84) Designated States (regional): **ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**
- Published: **— with international search report**

[Continued on next page]

(54) Title: **HOLDER FOR A CLAMSHELL-TYPE MOBILE PHONE**

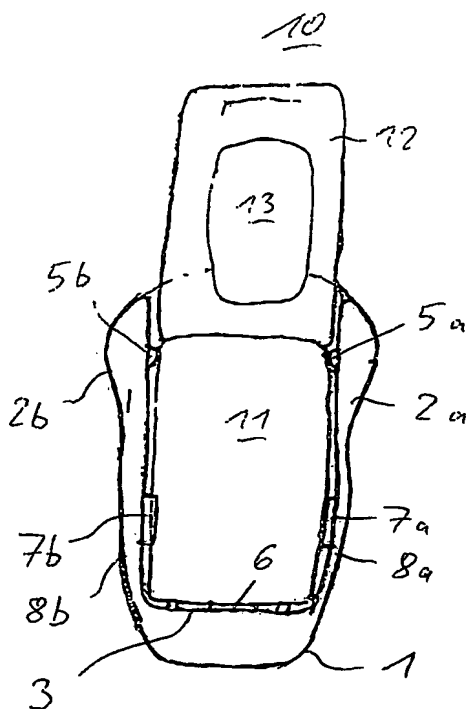

(57) **Abstract:** The present invention relates to a holder (1) for a clamshell-type mobile phone (10) with a first part (11) and a second part (12) connected to each other and foldable onto each other by a hinge means (14), said holder (1) comprising a holding structure having a left and a right sidewall (2a, 2b) for releasably holding said first part (11) of the mobile phone (10) and a lower sidewall (3) with a connector (16) for a connection to a corresponding connector (15) of the mobile phone (10), whereby said left and right sidewall (2a, 2b) respectively comprise a protruding element (5a, 5b) protruding towards the inside of the holding structure and adapted to engage into respectively apertures (17) of the hinge means (14) of the mobile phone (10).